



底座汽缸式平衡臂



SIZE "1" 150Nm

单汽缸平衡臂的性能及尺寸

型号	平衡力					
	2 Bar	3 Bar	4 Bar	5 Bar	6 Bar	7 Bar
S1PP111313000	7.5 Kg.	15 Kg.	23 Kg.	32 Kg.	38 Kg.	40 Kg.
D1PP111313000						
S1PP221313000	2 Kg.	7 Kg.	12 Kg.	17 Kg.	24 Kg.	29 Kg.
D1PP221313000						
S1PP331313000	/ Kg.	5 Kg.	10 Kg.	15 Kg.	22 Kg.	27 Kg.
D1PP331313000						

型号	吊杆长度 mm	臂长度 mm	平衡设备单元 \emptyset	扭矩限值 Nm	垂直杆	有效垂直冲程
S1PP111313000	600	600	63	150	30x30	770
D1PP111313000						
S1PP221313000	800	800	63	150	30x30	1030
D1PP221313000						
S1PP331313000	1000	1000	63	150	30x30	1030
D1PP331313000						

双汽缸平衡臂的性能及尺寸


型号	平衡力					
	2 Bar	3 Bar	4 Bar	5 Bar	6 Bar	7 Bar
S1PP111323000	14 Kg.	30 Kg.	40 Kg.	40 Kg.	40 Kg.	40 Kg.
D1PP111323000						
S1PP221323000	4 Kg.	14 Kg.	24 Kg.	34 Kg.	40 Kg.	40 Kg.
D1PP221323000						
S1PP331323000	2 Kg.	12 Kg.	22 Kg.	32 Kg.	40 Kg.	40 Kg.
D1PP331323000						

型号	吊杆长度 mm	臂长度 mm	平衡设备单元 \emptyset	扭矩限值 Nm	垂直杆	有效垂直冲程
S1PP111323000	600	600	63	150	30x30	770
D1PP111323000						
S1PP221323000	800	800	63	150	30x30	1030
D1PP221323000						
S1PP331323000	1000	1000	63	150	30x30	1030
D1PP331323000						

可用配件



地面固定装置 (标准)	S1PP... D1PP...	垂直旋转腕	PGV300000 PGV300003
墙壁固定装置	S1FP... D1FP...	水平旋转腕	PGO310000
轨道固定装置	S1VP... D1VP...	旋转工具主轴腕	PAO310000
这种臂供有一垂直杆。 购买时附送工具的具体长度。	A13000000 A23000000	工具支撑夹	MSO310000
	气动垂直轴制动器	F13P09000	工具支撑铰形座
旋转轴气动制动器	G10P09000	水平-垂直旋转腕	PPO310000
垂直固定腕	PFV300000 PFV300003	编码器支撑交叉	E11000000 E12000000
		仪器支架	S00000000

有关单独配件的性能请参考有关的页面。

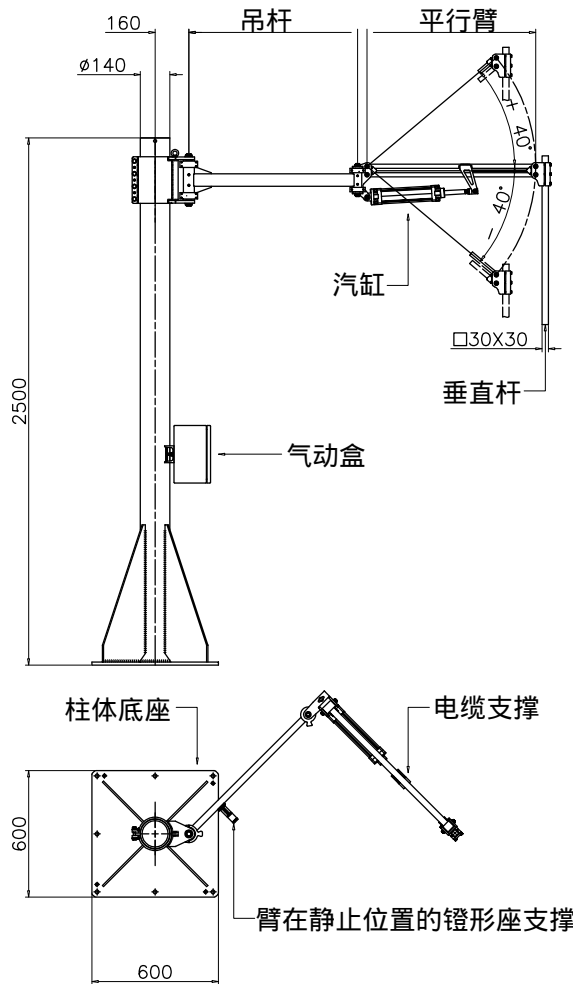

SX (左) 臂的分布

DX (右) 臂的分布

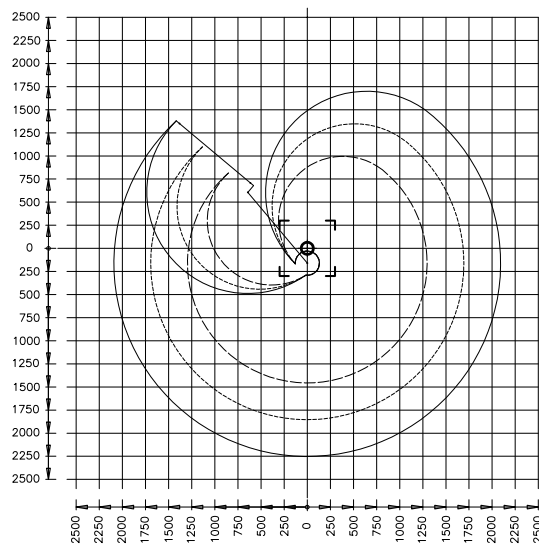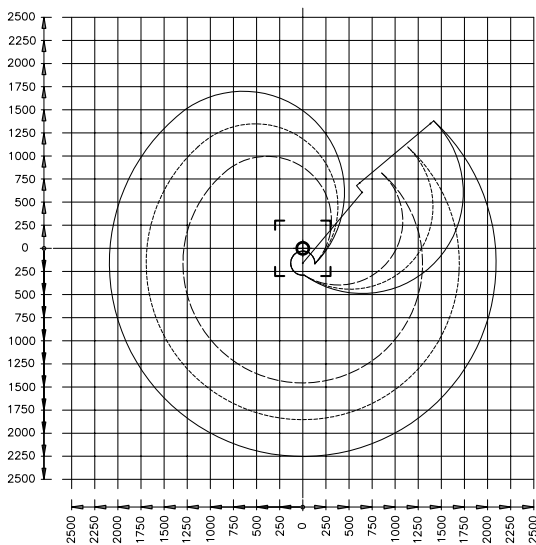

- Boom L-600 Arm L-600
- · - · - · Boom L-800 Arm L-800
- Boom L-1000 Arm L-1000